

# ABSOLUTE

OUTDOOR  $\approx$  2 CM


R 11 A + B + C



60x120 24"x48" R11



# ABSOLUTE

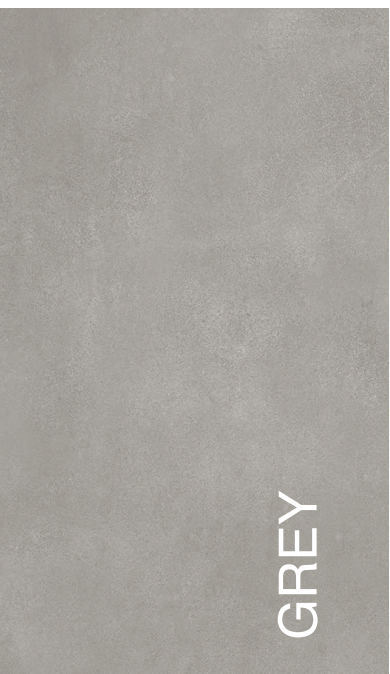

GREY



ICE



TAUPE




IVORY



60x120 24"x48" R11

Coming Soon  
BRICK WALL
















30x90 12"x36"

- ABCE60120IVGS** Ivory Rettificato 176
- ABCE60120TAGS** Taupe Rettificato 176
- ABCE60120ICGS** Ice Rettificato 176
- ABCE60120GYGS** Grey Rettificato 176

**ABSOLUTE CEMENT**  
20 MM

	grafiche printings	spessore thickness	pcs/box	mq/box	kg/box	box/pallet	mq/pallet	kg/pallet	fascia prezzo price range
60x120 24"x48" CEMENT Rettificato Rectified R11	4	20	1	0.72	32	32	23.04	1024	<b>176</b>

## NORMA DI RIFERIMENTO / SPECIFICATION REFERENCE ISO 13006/EN14411 APPENDICE G Bla GL

		<b>ABSOLUTE</b>	
Caratteristica tecnica Technical feature	Norma Norm	OUTDOOR $\pm$ 2CM	
LUNGHEZZA E LARGHEZZA LENGTH AND WIDTH	UNI EN ISO 10545-2	CONFORME IN ACCORDANCE	
SPESSORE THICKNESS		CONFORME IN ACCORDANCE	
RETILINEITÀ SPIGOLI STRAIGHTNESS OF SIDES		CONFORME IN ACCORDANCE	
ORTOGONALITÀ RECTANGULARITY		CONFORME IN ACCORDANCE	
PLANARITÀ SURFACE FLATNESS		CONFORME IN ACCORDANCE	
ASPETTO ASPECT		CONFORME IN ACCORDANCE	
 ASSORBIMENTO D'ACQUA WATER ABSORPTION	UNI EN ISO 10545-3	$\leq$ 0.5%	
 RESISTENZA A FLESSIONE FLEXURAL STRENGTH	UNI EN ISO 10545-4	$\geq$ 35 N/mm <sup>2</sup>	
 MODULO DI ROTTURA BREAKING STRENGTH		$\geq$ 1300 N	
 DETERMINAZIONE DELLA RESISTENZA ALL'URTO DETERMINATION OF IMPACT RESISTANCE	UNI EN ISO 10545-5	0.90	
 RESISTENZA ALL'ABRASIONE (METODO PEI) ABRASION RESISTANCE (PEI-METHOD)	UNI EN ISO 10545-7	PEI 3 + 5	
 COEFFICIENTE DI DILATAZIONE TERMICA LINEARE THERMAL EXPANSION COEFFICIENT	UNI EN ISO 10545-8	$(5,7-5,9) \times 10^{-6}/^{\circ}\text{C}$	
 RESISTENZA AGLI SBALZI TERMICI THERMAL SHOCK RESISTANCE	UNI EN ISO 10545-9	RESISTENTE RESISTANT	
 DETERMINAZIONE DELLA DILATAZIONE DOVUTA ALL'UMIDITÀ DETERMINATION OF MOISTURE EXPANSION	UNI EN ISO 10545-10	0,0 mm/m	
 DETERMINAZIONE DELLA RESISTENZA AL CAVILLO DETERMINATION OF CRAZING RESISTANCE	UNI EN ISO 10545-11	RESISTENTE RESISTANT	
 RESISTENZA AL GELO FROST RESISTANCE	UNI EN ISO 10545-12	INGELIVO FROST-RESISTANT	
 RESISTENZA AGLI AGENTI CHIMICI RESISTANCE TO CHEMICALS	UNI EN ISO 10545-13	MIN. CLASS B LB HB	
 RESISTENZA ALLE MACCHIE STAIN RESISTANCE	UNI EN ISO 10545-14	MINIMO CLASSE 3 MINIMUM CLASS 3	
 RESISTENZA ALLO SCIVOLAMENTO SLIP RESISTANCE	DIN 51130	CEMENT R11	
	DIN 51097	A+B+C	
	C.o.F B.C.R./D.M. 236 14/6/89	>0.40	
	D.C.o.F / ANSI A326.3	>0.42	
 REAZIONE AL FUOCO REACTION TO FIRE	96/603/CE	A1 <sub>F1</sub> /A1	
 GRADO DI VARIAZIONE CROMATICA AESTHETIC CLASSES	ANSI A137.1	V2	

